

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number  
**WO 2005/014332 A1**

(51) International Patent Classification<sup>7</sup>: **B60N 2/06**,  
2/20, 2/30

Centre, Widford Industrial Estate, Chelmsford, Essex CM1  
3BY (GB).

(21) International Application Number:  
PCT/GB2004/002930

(74) Agent: **DEALTRY, Brian**; Eric Potter Clarkson, Park  
View House, 58 The Ropewalk, Nottingham NG1 5DD  
(GB).

(22) International Filing Date: 7 July 2004 (07.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0317103.0 22 July 2003 (22.07.2003) GB

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(71) Applicant (*for all designated States except US*): **JOHN-  
SON CONTROLS AUTOMOTIVE (UK) LTD**  
[GB/GB]; The Hamilton Centre, Widford Industrial  
Estate, Chelmsford, Essex CM1 3BY (GB).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **LEWIS, Ian** [GB/GB];  
Johnson Controls Automotive (UK) Ltd, The Hamilton

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: VEHICLE SEAT SUPPORT STRUCTURE

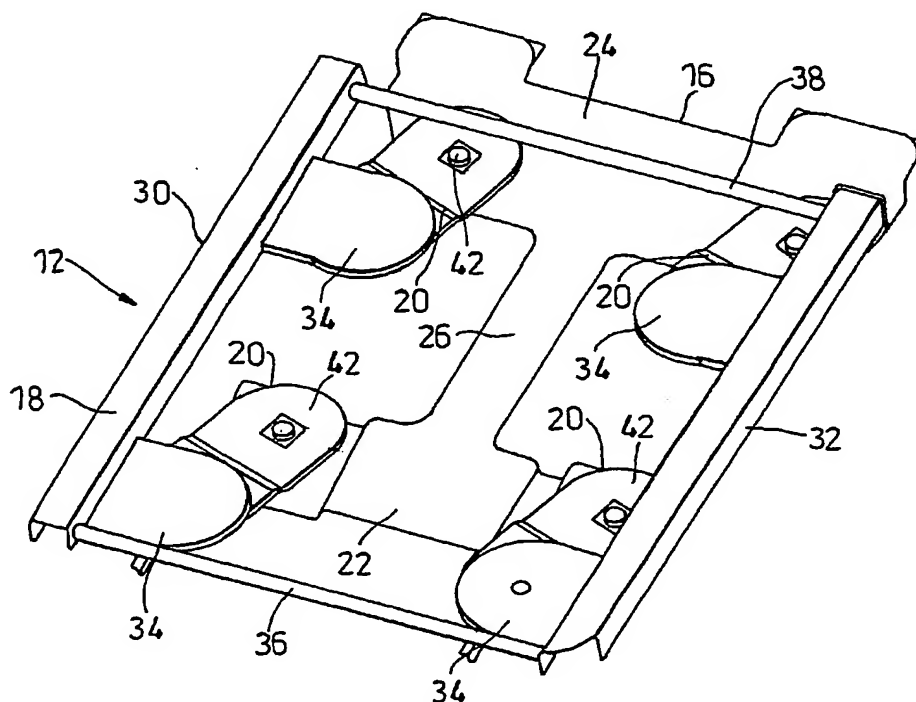

(57) Abstract: A vehicle seat support structure (12) for mounting a vehicle seat (S) on a floor of a vehicle for selective movement between first and second positions, which are laterally spaced from one another relative to the vehicle, includes a plurality of links (20). Each of the links (20) is adapted to be pivotally connected at one end to the vehicle seat (S) and at its other end to the vehicle floor.



FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*